

TDI TURBOTWIN T30-I

TURBOTWIN T30 SERIES The Benefits Are Yours

- The gear train and bearings are factory grease-packed for the life of the starter, so it requires no maintenance. There are no rubbing parts, so there is no external lubrication required. Lubricator problems, installation expense, system maintenance, and the messy and hazardous oil film around the starter exhaust . . . all are eliminated
- The TURBOTWIN T30-I starter fits a wide range of engine applications, up to 20 liters. One basic design can be used for a broad range of engine types.
- The TURBOTWIN T30-I is ideal for remote or "black" start applications. The unit requires no control lines or electrical wiring for its operation. And there are no complicated pre-engagement pistons to become a source of problems due to contamination or corrosion.
- Piping consists of only a single supply line with a ball valve or TDI relay valve in the line. There are no complicated control lines needed. See the typical manual or electric installation diagrams.
- The efficient twin-turbine motor design increases the torque applied to the ring gear, using less air per start than competitive designs. Refer to the performance curves for 6 nozzle models. The T30 Series includes models with 3, 6, and 12 nozzles.
- The T30-I starter can be used over a wide range of drive pressures from 30 psig (2 BAR) to 150 psig (10 BAR). It is suitable for operation on either compressed air or natural gas. The lightweight, 29 Lb, unit is capable of delivering over 21 HP (15.65 kW) of cranking power at only 120 psig (8 BAR).
- The TURBOTWIN T30-I starter contains absolutely no plastic or composite materials. All components are made from high strength aluminum or steel alloy.
- The durable turbine motor design in the TURBOTWIN T30 Series has no rubbing parts. It's tolerant of solid and liquid contamination in the supply gas with nearly no adverse affects. The motor is well adapted to running on "sour" natural gas.

**ENVIRONMENTALLY
SAFE**

**APPLICATION
VERSATILITY**

SIMPLICITY

**EASE of
INSTALLATION**

**LOWER AIR
CONSUMPTION**

**BROAD RANGE
OF OPERATION**

**HEAVY DUTY
CONSTRUCTION**

**CONTAMINATED
SUPPLY GAS**

from **TECH DEVELOPMENT INC.**
6800 Poe Ave. • Dayton, OH 45413-0557
Tel: 937 / 898 - 9600 Fax: 937 / 898 - 8431


- TECH DEVELOPMENT INC. introduced the first turbine technology for starting industrial engines in 1979. The TURBOTWIN T30 Series features an innovative and more reliable turbine motor than anything on the market today.

DEVELOPMENT HISTORY


The TURBOTWIN T30 Series is the result of TDI's continuing turbine starter design innovations. Based on our successful TURBOTWIN T100 Series starters, the TURBOTWIN T30 Series starters should exceed customer requirements in every installation.

- The high horsepower of a turbine air motor combined with the planetary gear speed reducer results in a very efficient and compact unit. The TURBOTWIN T30 Series models are powered by a pair of axial flow turbines coupled to a simple planetary gear reduction set. Model T30-I uses an inertia Bendix drive to engage and disengage the pinion from the ring gear.


DESCRIPTION of OPERATION

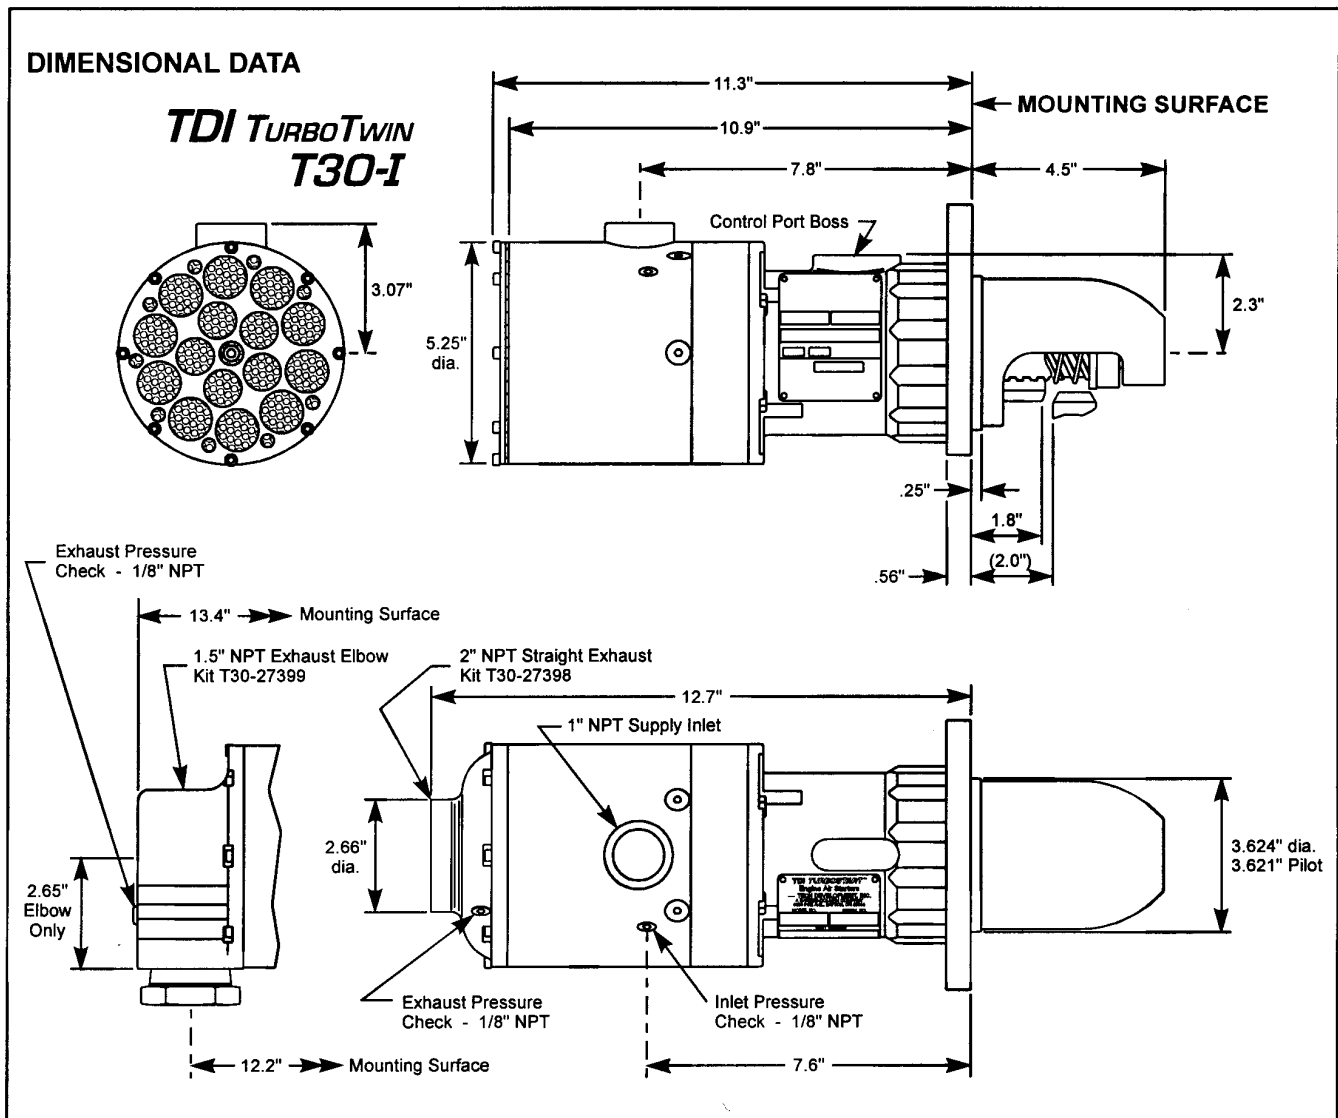

ELECTRIC INSTALLATION

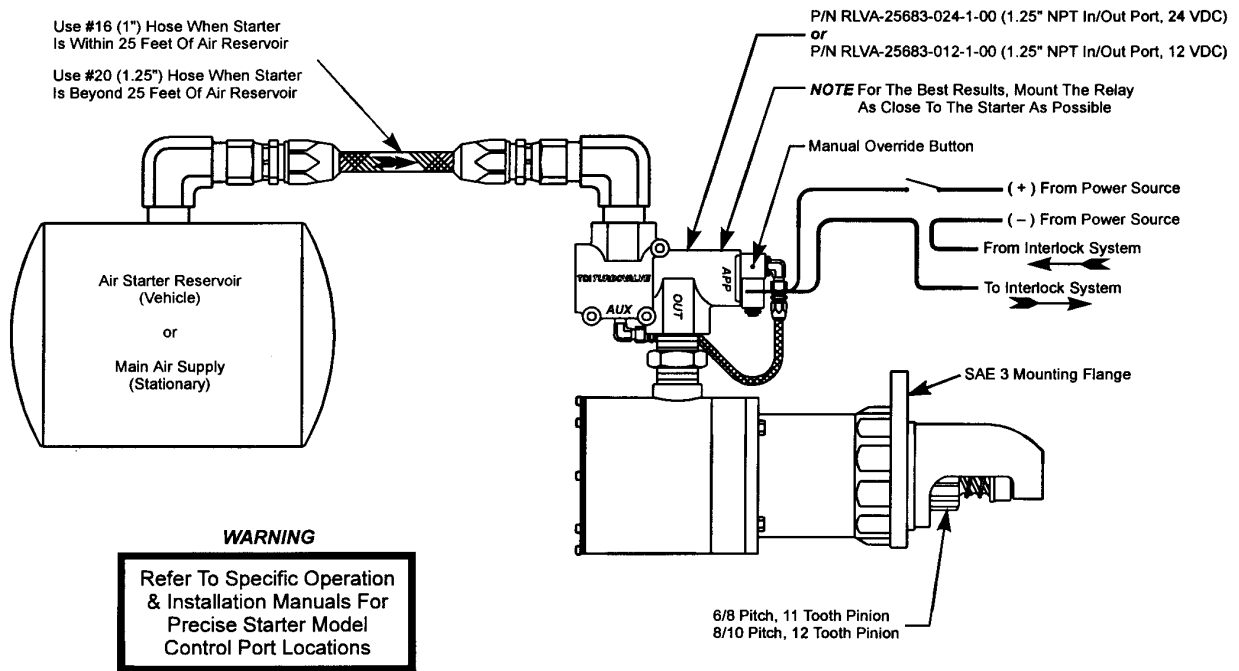

MANUAL INSTALLATION

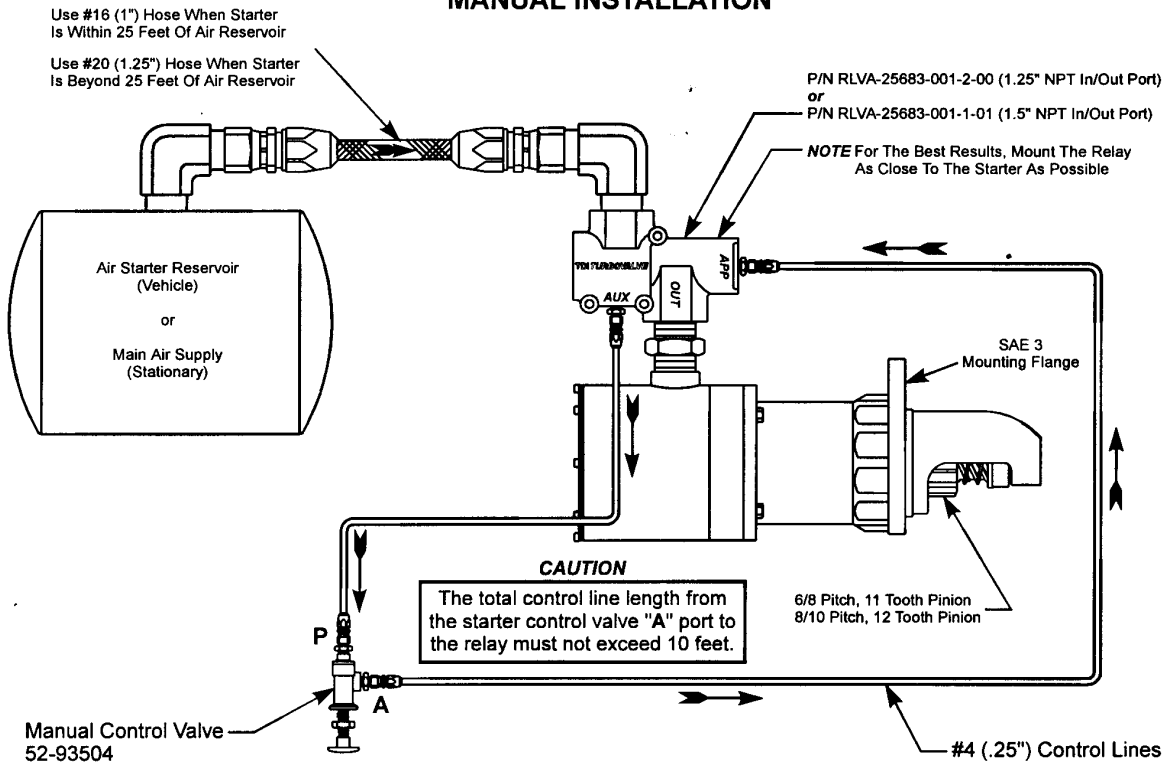


from **TECH DEVELOPMENT INC.**
6800 Poe Ave. • Dayton, OH 45413-0557
Tel: 937 / 898 - 9600 Fax: 937 / 898 - 8431

TDI TURBOTWIN T30-I PERFORMANCE CURVES


Model T306-I
6 NOZZLES
70° F, Compressed Air
11.4:1 Ratio

INLET Pressure	FLOW (Scfm)
120 PSIG	478
90 PSIG	365
60 PSIG	255

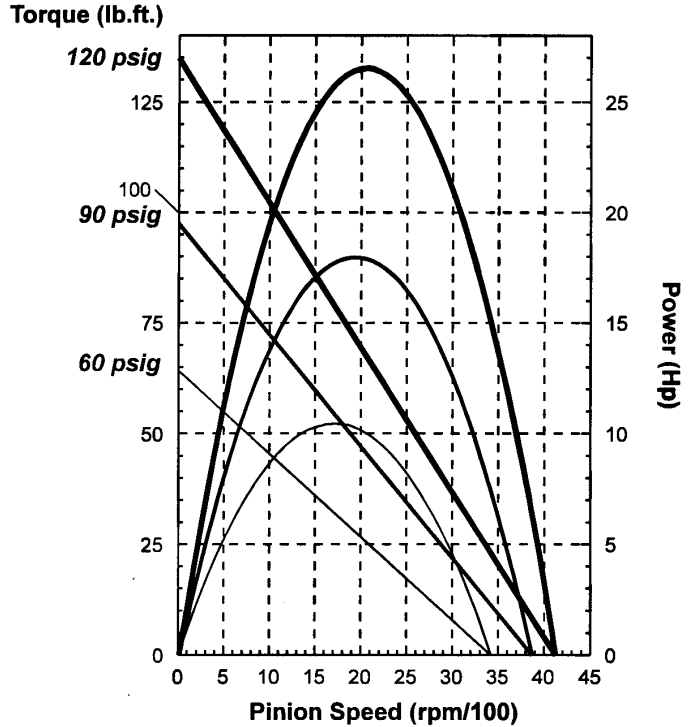

Model T306-I
6 NOZZLES
70° F, Methane Gas
11.4:1 Ratio

INLET Pressure	FLOW (Scfm)
120 PSIG	600
90 PSIG	465
60 PSIG	330

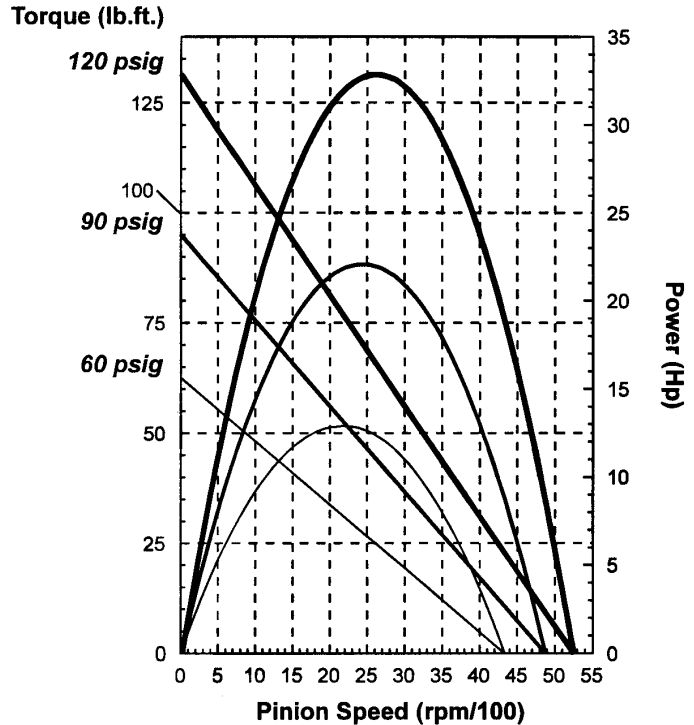

T30 Series: Flexibility To Meet Any Requirement

T30-I Inertia Engagement **T30-P** Pre-Engaged **T30-Y** Pre-Engaged/Overhung **T30-M** Industrial Air/Gas Drive Motor

from **TECH DEVELOPMENT INC.**

6800 Poe Ave. • Dayton, OH 45413-0557
Tel: 937 / 898 - 9600 Fax: 937 / 898 - 8431

Pub T30-701 r6/97 Man AN96-611